

\* Technical data and features subject to change without notice


### Pumping unit technical data

		PA1506/909F8
Max. theoretical output	m <sup>3</sup> /h	150/90
Max. pressure on concrete	bar	53/95
Concrete cylinders (diam. x stroke)	mm	230 x 2100
Concrete hopper capacity	l	550
Hydraulic circuit		aperto

Total weight less than 26 tons, payload to the user always available.

Super compact machine mounted on 6x4 4200\* wheelbase trucks for excellent maneuverability.

Contained stabilisation dimensions for easy placement in all types of job sites.

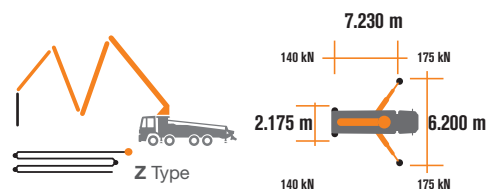

### Control System with pumping unit PA1506/909F8

#### Optional Easytronic Gold



Lsc Safe boom operation is guaranteed when two, three or four outriggers are fully opened.



Automatic RPM Management

### Placing boom technical data

		B4Z 30/26
Pipeline diameter	mm	125
Max. vertical reach	m	29,7
Max. horizontal distance (from center of slewing axis)	m	25,6
Min. unfolding height	m	7,5
Sections number		4
1st section opening angle		90°
2nd section opening angle		180°
3rd section opening angle		237°
4th section opening angle		245°
Rotating angle		+/-270°
End hose	m	4



STEELTECH Series

K30L

## Standard Equipment

- Front "X" style outriggers for a quick set-up and easy pump placement in narrow areas
- Driven by PTO or gear box
- Boom control by means of "Load Sensing" proportional distributor
- Safety device upon opening of concrete discharge door and hopper grille
- Emergency device for pumping group
- 2 Hetriconic proportional radio controls with 3 manipulators
- Emergency radio control cable 20 m
- Plastic water tank with 600-litre capacity
- Medium pressure water pump (50 l/min - 50 bar)
- LED lights for stabilisation and hopper lighting
- Double layer piping with chromium carbide inserts on the entire piping line
- Washing accessories
- High resistance of the components most subject to wear ("S" valve, wear plate, compensating ring)
- Declaration of conformity supplied with the user and maintenance manual

## Main Options

- Easytronic Gold (Easytronic Silver + LSC Light Stability Control)
- Automatic boom opening and closing
- Centralized boom lubrication system
- Concrete shut-off valve
- High pressure water pump (15 l/min - 150 bar)
- Radio remote control: Hetriconic or HBC equipped with display
- Straight concrete piping on double layer boom with high wear-resistance chromium carbide inserts CIFA LLT Long Life Top
- Wide choice of customer personalization colours

\*Over 100 options available; details available on truck pumps optional booklet

Distribution boom B4Z 30/26

